



CHANCE® NEW ADDITIONS



CHANCE® 2020 NEW ADDITIONS



Class 4 Slotted 22"x22" Blanket
Added Jan 2020



5H 2.5" Grounding Clamp
Added March 2020



Compact 3H Grounding Clamp
Added Feb 2020

CHANCE® 2019 NEW ADDITIONS



Capstan Hoist 2,000 lb. Fixed Hitch Mount
Added Dec 2019



Blanket Buttons
Added Nov 2019



35mm Ball Stud Cover
Added Aug 2019



Transmission Multi-Range Voltage
Indicator w/ Bluetooth connectivity
for mobile - Added June 2019



Rubber Glove Dust
Added Feb 2019



IEC Grounding Sets for Bare
Overhead Secondary Lines
Added Jan 2019



IEC Short Circuit Sticks
Added Jan 2019

CHANCE® 2018 NEW ADDITIONS



7H Universal Grounding Clamp w/
35mm Ball Stud
Added Aug 2018



7H 2.5" Grounding C-Clamp w/
350 MCM Cable and Ferrules
Added May 2018



5H Three-Way Grounding Clamp
Added May 2018



Class 6 Spiral Conductor Cover
Added February 2018



5H Flat-face Grounding Clamps
Added February 2018

CHANCE® NEW ADDITIONS



Wireless Phasing Set



Multi-Range
Voltage Indicator




Proximity Voltage
Indicator



ASTM 5H and 6H Rated
Cluster Bars



Automatic Push-On Ground Sets
IEC 8kA/1 sec

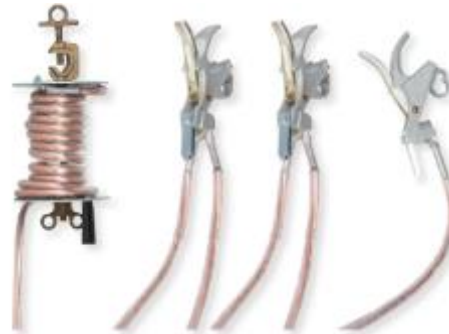

Automatic Snap-On Ground Sets
IEC 8kA/1 sec



5H All-Angle
Grounding Clamp

CHANCE® NEW ADDITIONS



Rubber Insulating
Crossarm Cover



Rubber Stinger Cover



Flexible Cutout Covers



Class 4 Solid
22" x 22" Blanket



Class 2 Slotted
22" x 22" Blanket



ABS Pole Covers



Fall Restraint Bracket



Universal Extension
Arm






Crossarm Link Stick
1500lb & 3500lb

CHANCE[®] COMPACT 3H GROUNDING C-CLAMP

FEATURES AND BENEFITS

- 3H Rated C-Clamp with aluminum body and smooth jaws
- Accommodates 0.162" to 0.8" diameter conductor
- Compact design weighs less than 1 pound and allows for access to tight areas
- Bronze Eye Screw – 5/8-11 UNC threads
- Tested per ASTM F855-17 to Grade 3H (31kA; 84kA 1st cycle peak; X/R=30)
- Available with factory-assembled sets (recommended) or as an individual component

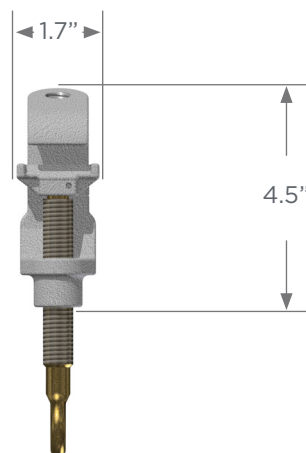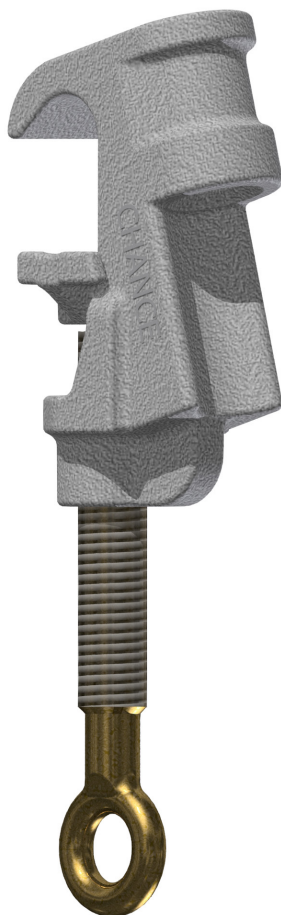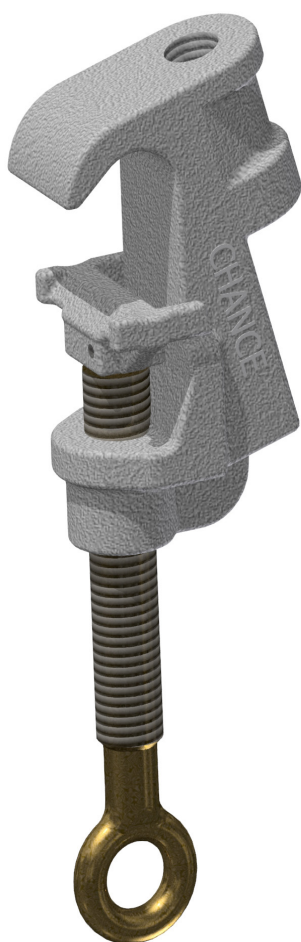

Catalog Number	Description	Weight
PSC6003696	Compact 3H Grounding C-Clamp	0.98 lbs (0.44 kg)



hubbelpowersystems.com

CHANCE
LINEMAN GRADE TOOLS™

For product inquiries, please contact
your local sales representative or customer service representative.


©2019 Hubbell Incorporated.
Because Hubbell has a policy of continuous product improvement,
we reserve the right to change design and specifications without notice.
Printed in the U.S.A. | SF_09_197E

CHANCE® CLASS 4 22" X 22" SLOTTED BLANKETS

MAX USE VOLTAGE 36KV PHASE TO PHASE

FEATURES AND BENEFITS

- Tested to ASTM D1048 and IEC 61112
- Type II (ozone-resistant)
- Protection from accidental brush contact during live line maintenance
- 100% electrically tested and date stamped
- Standard package quantity is 12

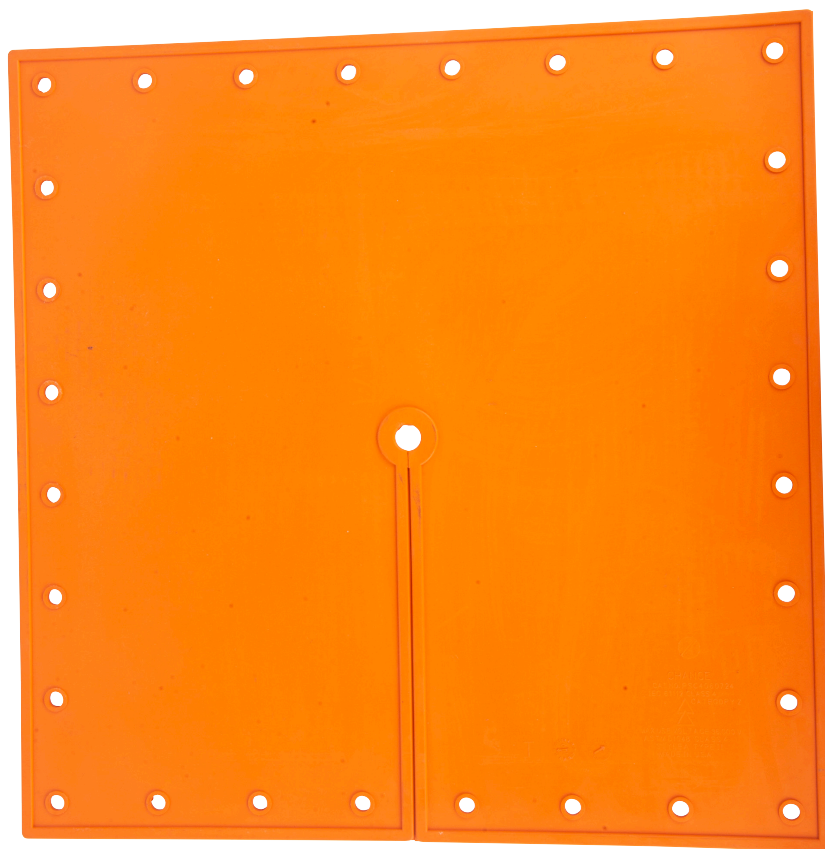

Catalog Number	Description	Weight
PSC4060724	Class 4 22"x 22" Slotted Orange Blanket	3.2lb. (1.5kg)



hubbellpowersystems.com

CHANCE
LINEMAN GRADE TOOLS™

**For product inquiries, please contact
your local sales representative or customer service representative.**

©2019 Hubbell Incorporated.
Because Hubbell has a policy of continuous product improvement,
we reserve the right to change design and specifications without notice.
Printed in the U.S.A. | SF_09_198E

CHANCE[®] CAPSTAN HOIST FIXED HITCH MOUNT

2,000 LB MAXIMUM WORKING LOAD

FEATURES AND BENEFITS

- For use with CHANCE 3,000 lb Capstan Hoists (max load 2,000 lbs) and CHANCE 1,000 lb Capstan Hoists (max load 1,000 lbs)*
- Fits standard 2" hitch receiver
- Robust steel construction
- The only manufacturer authorized fixed hitch mount for CHANCE Capstan Hoists

* Lowest rated component determines system rating



CATALOG NO.	DESCRIPTION	Weight
PSC3081578	Capstan Hoist Fixed Hitch Mount	45 lbs (20.4 kg)



hubbelpowersystems.com



**For product inquiries, please contact
your local sales representative or customer service representative.**

©2019 Hubbell Incorporated.
Because Hubbell has a policy of continuous product improvement,
we reserve the right to change design and specifications without notice.
Printed in the U.S.A. | SF_09_201E

NEW CHANCE[®] BLANKET BUTTONS

FOR USE WITH CHANCE RUBBER INSULATING BLANKETS

FEATURES AND BENEFITS

- Magnetic and back-to-back options
- Use in eyelets to secure blankets for live line work
- Install with rubber gloves or Grip-All Clampstick



BACK-TO-BACK



MAGNETIC

Catalog Number	Description	Weight
PSC4060759	CHANCE MAGNETIC BLANKET BUTTON	2.4oz (0.07KG)
PSC4060760	CHANCE BACK-TO-BACK BLANKET BUTTON	0.8oz (0.02KG)



CHANCE
LINEMAN GRADE TOOLS[™]

For product inquiries, please contact
your local sales representative or customer service representative.
hubbelpowersystems.com

©2019 Hubbell Incorporated.
Because Hubbell has a policy of continuous product improvement,
we reserve the right to change design and specifications without notice.
Printed in the U.S.A. | SF_09_179E

35MM BALL STUD COVER

FOR PROTECTION OF THE 35MM 7H GROUNDING BALL STUD

FEATURES AND BENEFITS

- Made to fit the CHANCE® PSC6003581 ball stud
- Made from non-conductive ozone/corona-resistant thermo-plastic elastomer
- Helps prevent flashover in enclosed switchgear, switch yards or substations
- Not designed as cover-up for accidental brush contact
- Snap fit
- Eye for use with grip-all clamp stick



PSC6003581



PSC4060750



Catalog Number	Description	Weight
PSC6003581	35mm Ball Stud 7H	1.8 lbs (0.8 kg)
PSC4060750	Cover for 35mm Ball Stud	1.0 oz (28 g)



For product inquiries, please contact
your local sales representative or customer service representative.
hubbellpowersystems.com

©2019 Hubbell Incorporated.
Because Hubbell has a policy of continuous product improvement,
we reserve the right to change design and specifications without notice.
Printed in the U.S.A. | SF_09_189E

TRANSMISSION MULTI-RANGE VOLTAGE INDICATOR (TMRVI)

WITH BLUETOOTH® CONNECTIVITY FOR DISPLAY ON MOBILE DEVICE

CHANCE® Lineman Grade Tools™ introduces the Transmission Multi-Range Voltage Indicator (TMRVI), used to determine if power lines are at rated voltage, have induced voltage or are de-energized. Must be used with properly selected universal hot stick, even with rubber gloves.

FEATURES & BENEFITS

- Visible voltage indicator for use up to 765kV AC Phase to Phase*
- Bluetooth connectivity to view TMRVI display live on a mobile device
- Large, easy-to-read dial face and brightly illuminated pointer indicate the voltage class.
- The class displayed is the approximate phase-to-phase and phase-to-ground voltage classes
- Can be used on overhead and underground lines with proper adapters
- Equipped with hold feature
- Battery Drawer for easy battery replacement with Lithium or Alkaline AA batteries
- Comes with storage bag designed to attach to line worker's belt
- Lightweight, 1.25 lbs versus the 2.5 lbs. of the MRVD, C4030979

* For Distribution Voltages Including Capacitive Test Point - Use PSC4033710

OPTIONAL FIELD TESTER

- The Transmission Multi-Range Voltage Indicator can be field tested with the Voltage Indicator Tester PSC4033582



PART NUMBER

PSC4033955

DESCRIPTION

Transmission Multi-Range Voltage Indicator

WEIGHT

1-1/4 lbs.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Hubbell Power Systems, Inc. is under license. Other trademarks and trade names are those of their respective owners.



CHANCE Lineman Grade Tools | Hubbell Power Systems, Inc. | hubbellpowersystems.com

©Copyright 2019 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

Printed in the U.S.A. | SF_09_174E




CHANCE[®] RUBBER GLOVE POWDER

FOR USE WITH CHANCE[®]
LINEMAN GRADE GLOVES[™]

Helps absorb perspiration during line work

FEATURES AND BENEFITS

- 5 oz. bottle
- Case size 48 bottles
- Easy storage
- Facilitates glove donning and removal

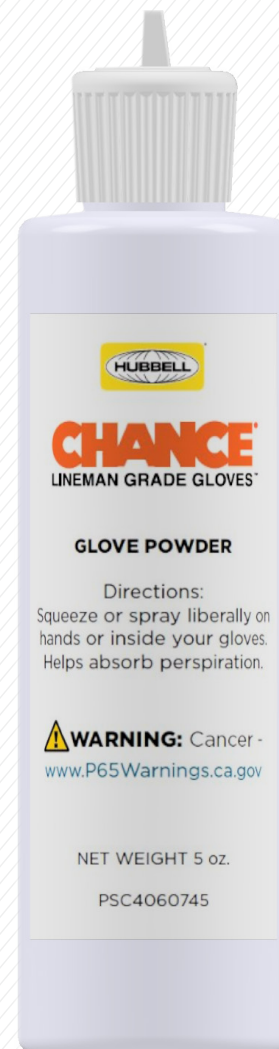

CATALOG NUMBER
PSC4060745

DESCRIPTION
CHANCE Rubber Glove Powder

WEIGHT
5.0oz (0.14Kg)



hubbellpowersystems.com

**Contact your Hubbell Power Systems
representative for specification sheets.**

©2018 Hubbell Incorporated.
Because Hubbell has a policy of continuous product improvement,
we reserve the right to change design and specifications without notice.
Printed in the U.S.A. | SF_09_166E


GROUNDING SETS FOR SECONDARY OVERHEAD SYSTEMS

NEW GROUNDING/EARTHING EQUIPMENT

CHANCE® Lineman Grade Tools™ introduces grounding sets with spring-loaded clamps for bare secondary overhead systems.

FEATURES

- Rated and tested per IEC 61230 at 3kA/1 Second
- Handle tested at 100kV per 30 cm per ASTM F711 and IEC 60855
- Spring-loaded clamps for quick and easy installation and removal
- Lightweight
- Clamps are interconnected by 16 mm² grounding cable
- Conductor range:
Min. 3 mm up to Max. 17 mm diameter
- Sets available in custom configurations

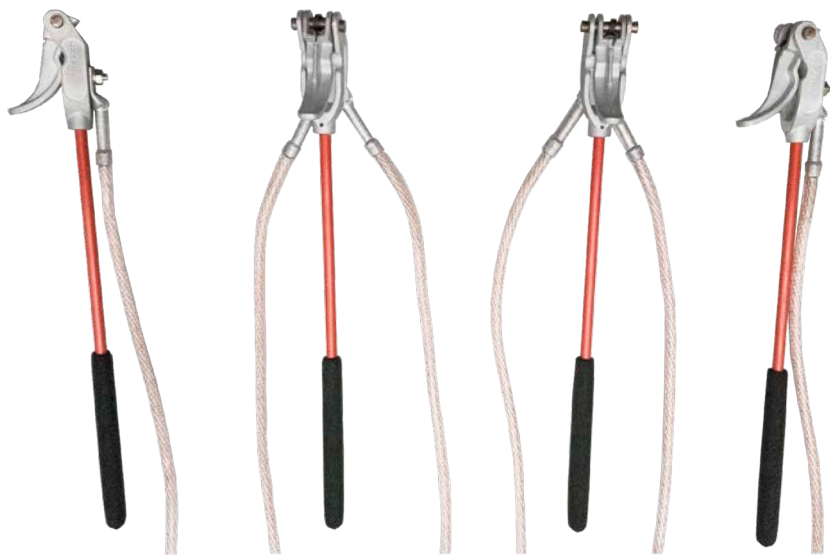

PART NUMBER	DESCRIPTION	WEIGHT
PSC6003694	GROUND SET - LV - 4 CLAMPS - 3 X 0.5M LEADS 16 mm ²	1.4 kg
PSC6003695	GROUND SET - LV - 5 CLAMPS - 4 X 0.5M LEADS 16 mm ²	1.7 kg



CHANCE Lineman Grade Tools | Hubbell Power Systems, Inc. | hubbellpowersystems.com

©Copyright 2019 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

Printed in the U.S.A. | SF_09_167E



SHORT CIRCUIT STICK

NEW GROUNDING TOOL

CHANCE® Lineman Grade Tools™ introduces the Short Circuit Stick with spring loaded clamps for bare vertical secondary overhead systems.

FEATURES

- Rated and tested per IEC 61230 at 3kA/1 Second
- Handle meets ASTM F711 and IEC 60855
- Clamps are connected by an aluminum channel mounted on a 27 mm diameter Epoxiglas® pole
- Clamps are spring loaded and allow connection of the phases to the neutral in one swift movement
- Available with 4 clamps, 5 clamps, or as a dual unit with 4 and 5 clamps, and clamp spacing options of 20 cm or 30 cm
- Conductor range: Min. 3.5 mm up to Max. 19.5 mm diameter



PART NUMBER	DESCRIPTION	CLAMP SPACING	WEIGHT
PST6003583	Short Circuit Stick w/ 4 clamps	20 cm	1.2 kg
PST6003584	Short Circuit Stick w/ 5 clamps	20 cm	1.5 kg
PST6003585	Short Circuit Stick w/ 4 and 5 clamps	20 cm and 20 cm	2.1 kg
PST6003615	Short Circuit Stick w/ 4 clamps	30 cm	1.3 kg
PST6003616	Short Circuit Stick w/ 4 and 5 clamps	30 cm and 20 cm	2.2 kg



CHANCE Lineman Grade Tools | Hubbell Power Systems, Inc. | hubbellpowersystems.com

©Copyright 2019 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

Printed in the U.S.A. | SF_09_103E




7H UNIVERSAL GROUND CLAMP

CONNECT TO CONDUCTOR, BUS OR BALL STUD

FEATURES AND BENEFITS

- Tested per ASTM F855-17 to Grade 7H (68kA; 183kA 1st cycle peak; X/R=30)
- Universal Clamp with aluminum body
- For up to 2" dia. conductor or bus, or 35mm Ball Stud
- Available as factory-assembled sets (recommended) or individual components

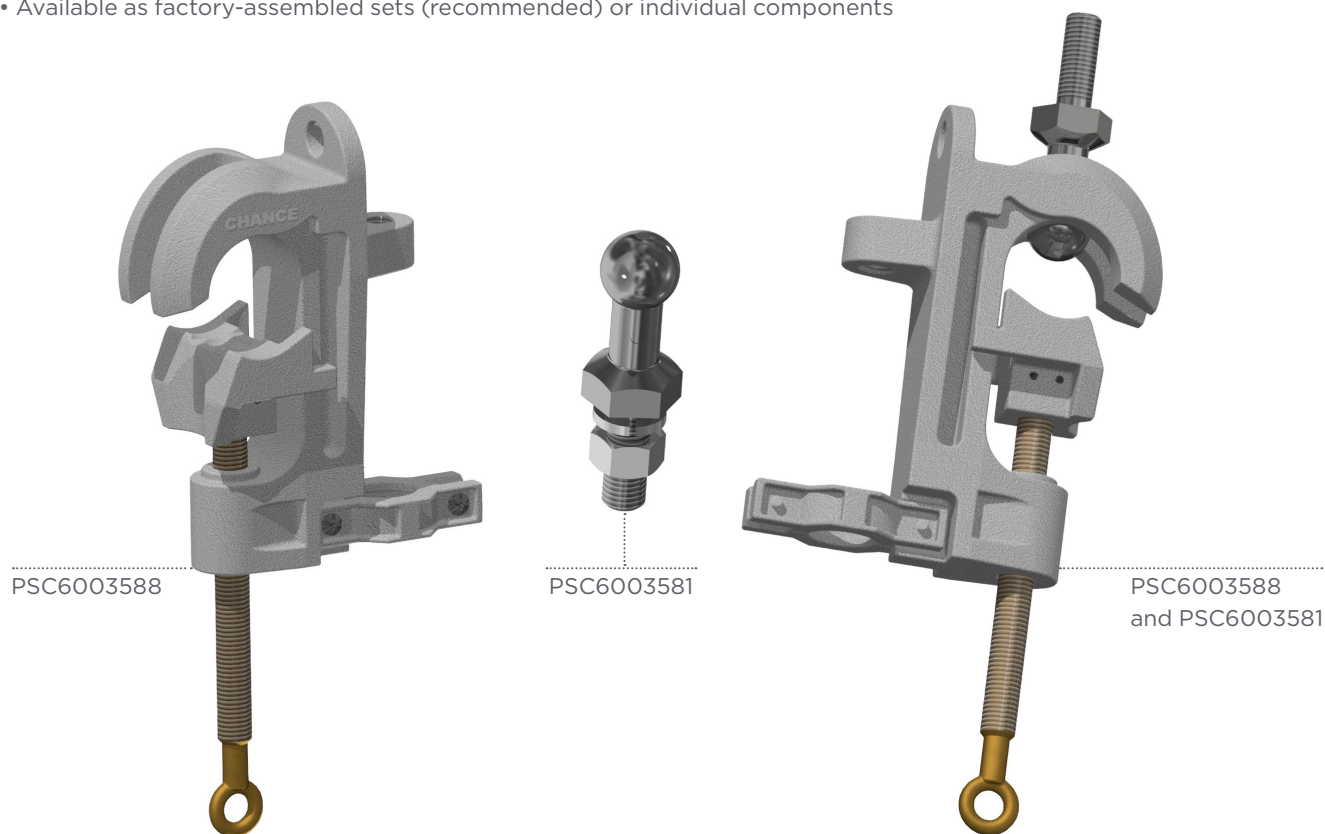

CATALOG NO.

DESCRIPTION

WEIGHT

PSC6003588	7H Universal Clamp	5.6 lb (2.6 kg)
PSC6003581	35mm Ball Stud 7H	1.8 lbs (0.8 kg)
PSC6003603	Grounding Ferrule 350 MCM Unshrouded Copper	1.1 lbs (0.5 kg)
PSC6003604	Grounding Ferrule 350 MCM Unshrouded Tin-Plated	1.1 lbs (0.5 kg)
PSS18067	350 MCM Yellow Grounding Cable	0.8 lbs/ft (1.2 kg/m)

Contact your local HPS representative for custom length grounding sets

Hubbell has a policy of continuous product improvement. Please visit hubbellpowersystems.com to confirm current design specifications.




7H 2.5" GROUNDING C-CLAMP

CLAMPS OR ASSEMBLED GROUND SETS WITH 7H CABLE AND FERRULES

FEATURES AND BENEFITS

- C-Clamp with aluminum body and smooth jaws for 0.625" to 2.5" Conductor/Bus Bar
- 350 MCM cable with yellow thermoplastic elastomer (TPE) jacket
- Unshrouded Threaded Copper or Tin-Plated Ferrule – 3/4-10 UNC
- Bronze Eye Screw – 3/4-6 ACME
- Clamp equipped with Lift-Assist Ring
- Tested per ASTM F855-17 to Grade 7H (68kA; 183kA 1st cycle peak; X/R=30)
- Available as factory-assembled sets (recommended) or individual components

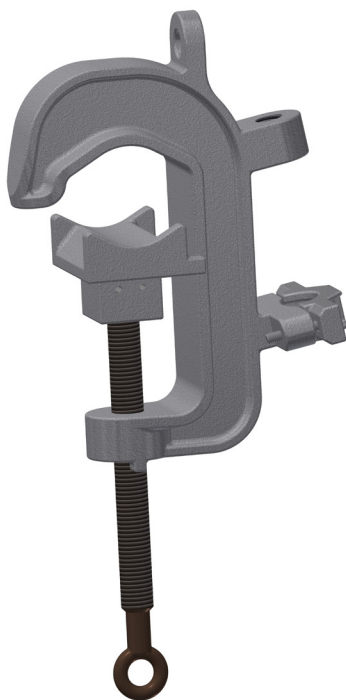

CATALOG NUMBER	DESCRIPTION	WEIGHT
PSC6003630	7H 2.5" Grounding C-Clamp	6.1 lbs (2.8 kg)
PSC6003603	Grounding Ferrule 350 MCM Unshrouded Copper	1.1 lbs (0.5 kg)
PSC6003604	Grounding Ferrule 350 MCM Unshrouded Tin-Plated	1.1 lbs (0.5 kg)
PSS18067	350 MCM Yellow Grounding Cable	0.79 lbs/ft (1.18 kg/m)

Contact your local HPS representative for custom length grounding sets



Hubbell Power Systems, Inc. | hubbellpowersystems.com

©Copyright 2018 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

SF_09_149E




5H THREE-WAY UNIVERSAL GROUNDING CLAMP


VERSATILITY FOR DIFFERENT CONFIGURATIONS AND CONNECTION POINTS

FEATURES AND APPLICATIONS


- Installs on ball stud (30mm) or conductor/bus (0.5" to 1.5")
- Provides single connection point for center phase when using optional ball studs
- Tapped for 5/8"-11 UNC threaded ferrule
- Tin-plated 30mm (1.18") Ball Stud (sold separately)

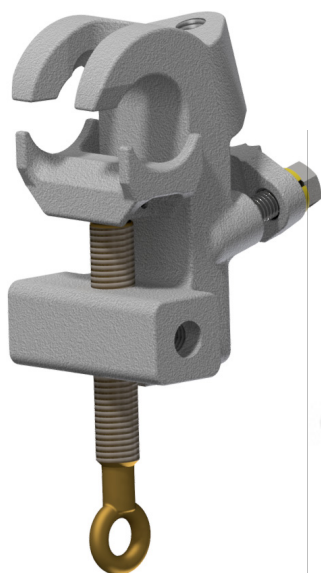

3-Way Clamp
(PSC6003626)

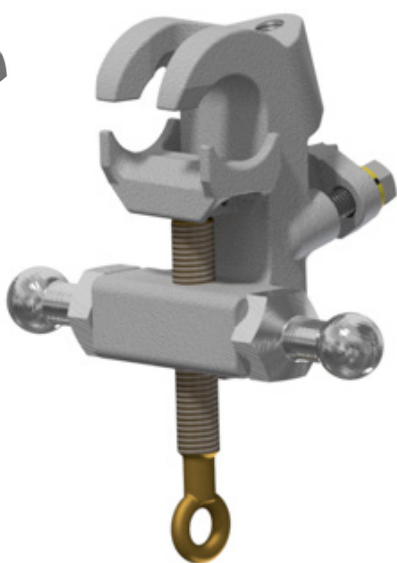

3-Way Clamp (PSC6003626) w/ two
Ball Studs (sold separately)

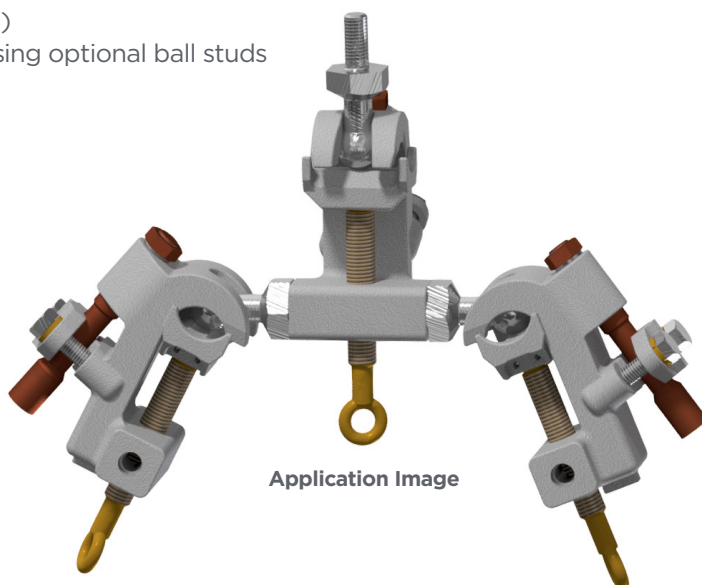

Application Image



30mm Ball Stud
(PSP6003513P)

CATALOG NO.	DESCRIPTION	WEIGHT
PSC6003626	5H Three-Way Universal Grounding Clamp	3.88 lbs (1.76 kg)
PSP6003513P	5H 30mm Ball Stud	0.91 lbs (0.41 kg)

SPIRAL CONDUCTOR COVER

NEW CLASS 6 OPTION

FEATURES & APPLICATIONS

- Provides protection for accidental brush contact during live line maintenance up to 72.5kV
- Tested per ASTM F712
- Made from tough, durable ABS Plastic
- Includes grip-all adapter for hotstick installation
- Overall length of approximately 53in. (1.3m)



CATALOG NUMBER	DESCRIPTION	WEIGHT
PSC4060737GA	Class 6 72.5 kV Spiral Conductor Cover	11 lbs (5 kg)




5H FLAT-FACE GROUNDING CLAMP

NEW LIGHTER WEIGHT OPTION

FEATURES

- Same 5H rating at around half the weight of bronze 5H flat-face clamps
- Designed for use on angle iron, tower steel, ground rod or 4/0 conductor
- Tested per ASTM F855*
- Jaw opening range of 0.125" - 1.5"

**Must use set screws for 5H applications*

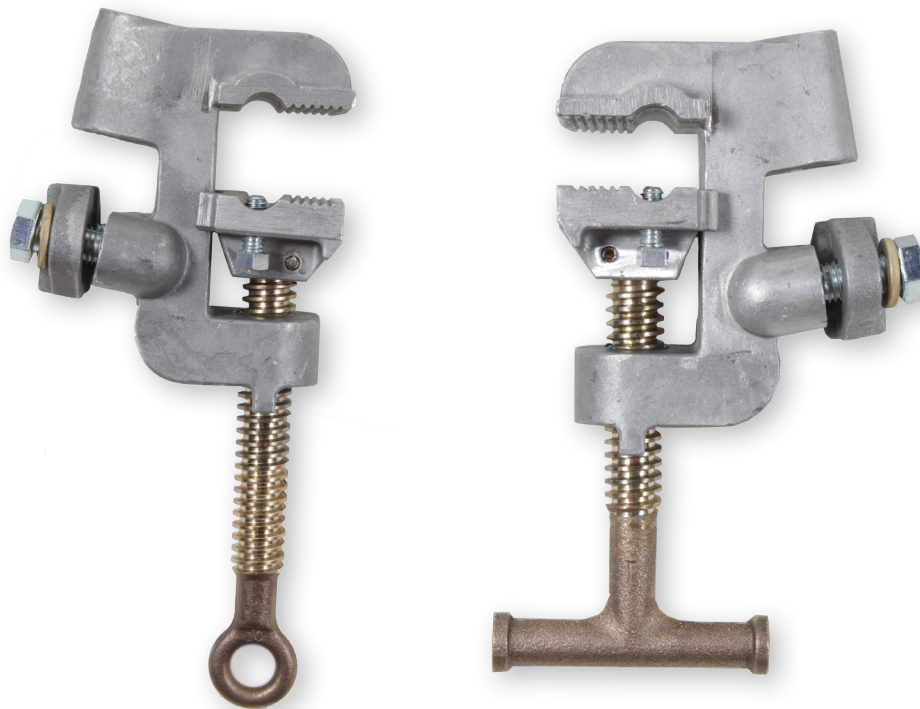

CATALOG NUMBER	DESCRIPTION	WEIGHT
PSC6003635	5H Flat-Face Grounding Clamp with T-Handle	2.6 lbs. (1.2 kg)
PSC6003636	5H Flat-Face Grounding Clamp with Eye Screw	2.6 lbs. (1.2 kg)

WIRELESS PHASING SET (WPS)

CAPACITIVE TEST POINT THROUGH 765KV AC

FEATURES & BENEFITS


- Wireless Main and Probe Units communicate via linked digital radios - 300 ft. range
- Determine phase relationship between two conductors with same nominal voltage
- Displays “In-Phase” or “Out-of-Phase” in WPS mode
- For Overhead / Underground use on 50/60Hz systems
- Adjustable audible alarm
- Main has Full Range ARVI functionality like PSC4032915
- Field test with PSC4033582 tester
- Shock Tested per IEC 60068-2-27
- Vibration Tested per IEC 60068-2-6
- For use with hot sticks only



Orange Bag



Hard Case (sold separately)



PART NUMBER

DESCRIPTION

PSC4032916	Wireless Phasing Set with Orange Bag
PSC4033926	Wireless Phasing Set with Hard Case
PSC4033811	Hard Case Only



CHANCE Lineman Grade Tools | Hubbell Power Systems, Inc. | hubbellpowersystems.com

©Copyright 2017 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

Printed in the U.S.A. | SF_09_118E



MULTI-RANGE VOLTAGE INDICATOR (MRVI)

WITH BLUETOOTH® CONNECTIVITY FOR DISPLAY ON MOBILE DEVICE


Chance® Lineman Grade Tools™ introduces the Multi-Range Voltage Indicator (MRVI), used to determine if power lines are at rated voltage, have induced voltage or are de-energized. Must be used with properly selected universal hot stick, even with rubber gloves.

FEATURES & BENEFITS

- Visible voltage indicator with range from Capacitive Test Point up to 80kV Phase-to-Phase
- Bluetooth connectivity to view MRVI display live on a mobile device
- Large, easy-to-read dial face and brightly illuminated pointer indicate the voltage class.
- The class displayed is the approximate phase-to-phase and phase-to-ground voltage classes
- Can be used on overhead and underground lines with proper adapters
- Equipped with hold feature
- Battery Drawer for easy battery replacement with Lithium or Alkaline AA batteries
- Comes with storage bag designed to attach to line worker's belt
- Lightweight, 1.25 lbs versus the 2.5 lbs. of the MRVD, C4030979

OPTIONAL FIELD TESTER

- The Multi-Range Voltage Indicator can be field tested with the Voltage Indicator Tester PSC4033582

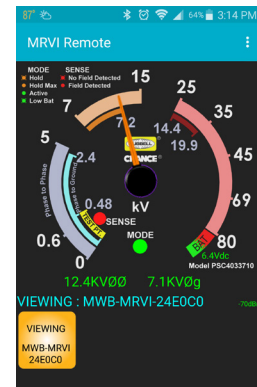

Mobile App Display

PART NUMBER

PSC4033710

DESCRIPTION

Multi-Range Voltage Indicator

WEIGHT

1-1/4 lbs.

The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Hubbell Power Systems, Inc. is under license. Other trademarks and trade names are those of their respective owners.



CHANCE Lineman Grade Tools | Hubbell Power Systems, Inc. | hubbellpowersystems.com

©Copyright 2016 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

Printed in the U.S.A. | SF_09_109E



CHANCE[®] 5H AND 6H RATED CLUSTER BARS

NOW TESTED PER ASTM F855-15 TO GRADES 5H AND 6H

CHANCE Cluster Bars have been used for nearly 50 years! In keeping up with industry needs, CHANCE Cluster Bars are now available with 5H and 6H ratings.



Cluster Bar with penetrating feature

CHANCE 5H and 6H Rated Cluster Bars are also available with an integral pole-penetrating option. See OSHA 1910.269 Appendix C for more information on protecting workers from hazardous differences in electrical potential and penetration of the pole.

CATALOG NUMBER	DESCRIPTION	ASTM F855-15 RATING	RATED CURRENT (15 CYCLES)	FIRST CYCLE TEST CURRENT PEAK	WEIGHT
PSC6003628	5H Rated Cluster Bar, 5/8" dia. x 11"	5H	47 kA	127 kA	10.7 lbs. (4.9 kg)
PSC6003628A	5H Rated Penetrating Cluster Bar, 5/8" dia.				10.8 lbs. (4.9 kg)
PST6003466	6H Rated Cluster Bar, 1" dia. x 11"	6H	55 kA	148 kA	12.0 lbs. (5.4 kg)
PST6003466A	6H Rated Penetrating Cluster Bar, 1" dia.				12.1 lbs. (5.5 kg)



CHANCE Lineman Grade Tools | Hubbell Power Systems, Inc. | hubbellpowersystems.com

©Copyright 2017 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.



SF_09_124E

PROXIMITY VOLTAGE INDICATOR (PVI)

600V TO 500KV - AUDIBLE & VISIBLE INDICATORS

FEATURES & APPLICATIONS

- Bright display lights and audible alarm indicate voltage class without need to directly contact the conductor
- Used to determine if power lines are at rated voltage, have induced voltage or are de-energized
- Designed to be held 6 to 18 inches away from conductor being tested for presence of voltage
- As the voltage field intensity increases, the Proximity “SENSE” LED, Range LED and audible alarm will flash and beep faster
- Advanced feature allows user to temporarily disable range indications for voltages below the user selected range
- New battery drawer does not require removal of front panel for replacement of batteries
- Comes with storage bag designed to attach to line worker’s belt or use during storage
- Lightweight, 1.25lbs versus the 4.75lbs of the Super Tester

OPTIONAL FIELD TESTER

- The proximity voltage indicator can be field tested with the Voltage Indicator Tester PSC4033582 seen below



CATALOG NO.

DESCRIPTION

WEIGHT

PSC4033737

Proximity Voltage Indicator and Bag

1-1/4 lbs.

Hubbell has a policy of continuous product improvement. Please visit hubbellpowersystems.com to confirm current design specifications

SF_09_090_E

22" X 22"

SLOTTED BLANKETS


NEW RUBBER BLANKET SELECTION**CLASS 2 TYPE II****FEATURES AND APPLICATIONS:**

- Meets or exceeds ASTM Standard Specification D1048
- Class 2 Type II (ozone-resistant)
- Protection from accidental brush contact with energized components during line maintenance
- Made of ozone/corona-resistant elastomer
- Special formulation exhibits superior resistance to long-term aging/checking
- Standard package quantity is 12
- 1.5 inch (38 mm) diameter center hole
- 12 eyelets

CATALOG NUMBER

- PSC4060708

Hubbell has a policy of continuous product improvement. Please visit hubbellpowersystems.com to confirm current design specifications

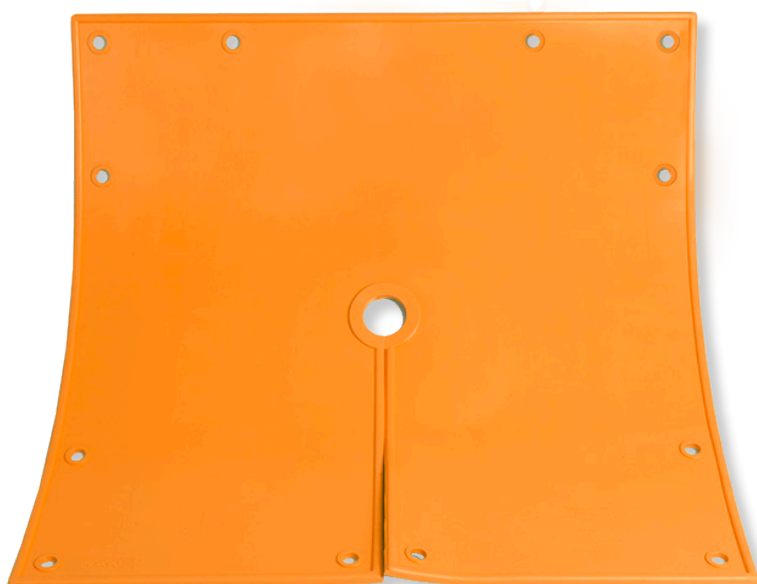

ABS POLE COVERS

NEW CLASS 4 ABS SELECTION

FEATURES AND APPLICATIONS

- Meets or exceeds ASTM F712
- Class 4 (36.6kV Covered Phase-to-Covered Phase)
- Protection from accidental brush contact with energized components during pole removal/installation and other line maintenance
- Made of ABS plastic
- Covers can be joined by overlapping impressions



CATALOG NO.	DIAMETER	LENGTH
PSC4060699	9 in. (22.9 cm)	72 in. (182.9 cm)
PSC4060700	9 in. (22.9 cm)	48 in. (121.9 cm)
PSC4060701	9 in. (22.9 cm)	36 in. (91.4 cm)
PSC4060702	9 in. (22.9 cm)	24 in. (61.0 cm)
PSC4060703	9 in. (22.9 cm)	12 in. (30.5 cm)
PSC4060704	12 in. (30.5 cm)	72 in. (182.9 cm)
PSC4060705	12 in. (30.5 cm)	48 in. (121.9 cm)
PSC4060706	12 in. (30.5 cm)	24 in. (61.0 cm)
PSC4060707	12 in. (30.5 cm)	12 in. (30.5 cm)



CHANCE® Lineman Grade Tools™ | Hubbell Power Systems, Inc. | hubbellpowersystems.com

©Copyright 2016 Hubbell Incorporated. Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

Printed in the U.S.A. | SF_09_112 E



FALL RESTRAINT BRACKET



Provides insulation/Isolation from differences in potential by means of the 6" Epoxiglas link
Meets 5,000 lb. requirement as specified by OSHA 1910.66 App C personal fall arrest requirements



- Ratchet system with 48" nylon strap allows for quick and easy attachment to up to 18" dia. pole



- Swivel attachment head provides easy attachment to lanyard

CATALOG NO.

PSC4021489

DESCRIPTION

PERSONAL FALL RESTRAINT BRACKET

WEIGHT

10 LBS. (4.5 KG)

Universal Extension Arms

- Fit composite or wood crossarms up to 3¾" x 4¾"
- Cushioned clamp and hanger loop to protect composite arms
- Grippers on clamp can be removed for wood crossarms
- Design allows removal of components for reconditioning pole
- Designed for use with rubber gloves or hot sticks



6-ft. Universal Extension Arm PSC4004101




Catalog No.	Epoxiglas® Arm Dia & Length	Number of Wireholders	Fits Maximum Crossarm Size	Max. Vertical Loading per Wireholder
PSC4004101	2½" x 6'	2	3¾" x 4¾"	150 lb.
PSC4004102	2½" x 5'	1	3¾" x 4¾"	150 lb.

Universal Extension Arm Retrofit Kit

- Allows conversion of wood-only Extension Arms to Universal Extension Arms

CROSSARM CLAMP WITH RUBBER GRIPPERS & POLE END FITTING

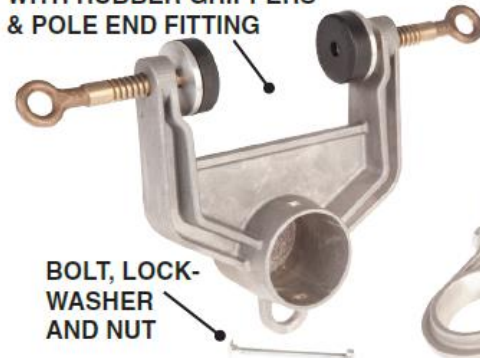

CROSSARM LOOP WITH PLASTISOL COATING & POLE CLAMP




Kit instructions show how to cut off the old end fitting and drill for the attachment of the new bolt-on end fitting.

Conversion permits easy removal of the Crossarm Clamp for periodic reconditioning of the pole.

Universal Extension Arm Retrofit Kit PSC4004103

CROSSARM LINK STICK

NOW AVAILABLE WITH 3500 LB-RATED WORKING LOAD

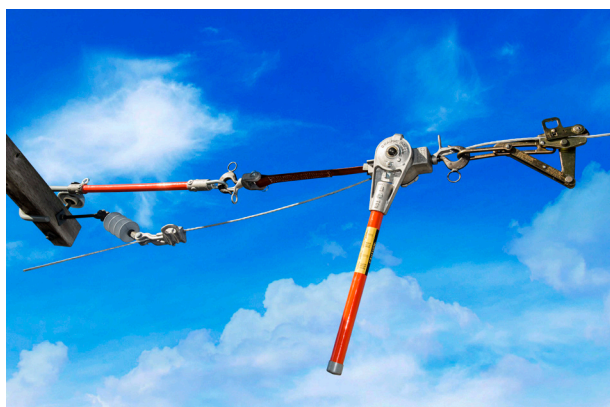

Pictured with Nylon-Strap Ratchet Hoist and Hot Line Wire Grips

- Quick and easy set up, no sling necessary
- Plastisol-coated steel hook
- Fits standard 3-3/4" x 4-3/4" crossarms with 5" hook
- Galvanized steel swivel eye on conductor end for easy alignment
- Lifting eye on hook fitting for easy positioning by a hot line tool
- Also available with 1500 lb-rated working load
- Insulated Epoxiglas® length: 21.5"; total length: 41"
- Custom Epoxiglas lengths available

CATALOG NO.

DESCRIPTION

WEIGHT

PSC4004132
PSC4004372


Crossarm Link Stick - 1500 lb
Crossarm Link Stick - 3500 lb

7.0 lbs.
8.0 lbs.

Hubbell has a policy of continuous product improvement. Please visit hubbellpowersystems.com to confirm current design specifications.

SF09024E

CHANCE® 5H 2.5" GROUNDING C-CLAMP

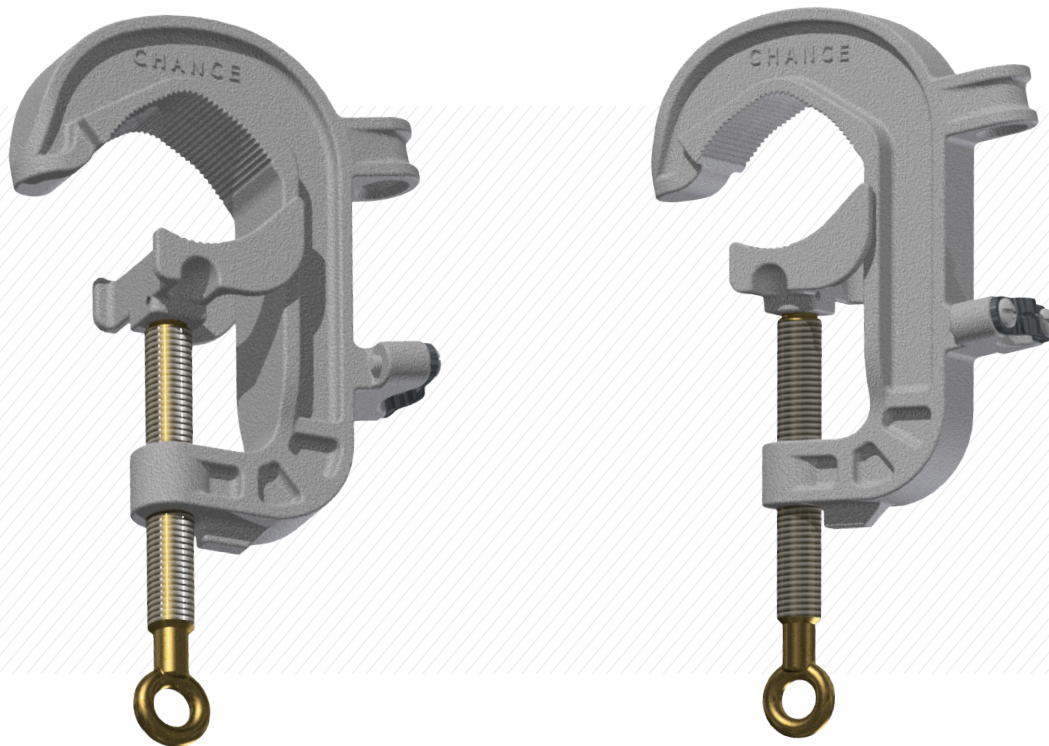

- 5H Rated C-Clamp with aluminum body and serrated jaws
- Accommodates 0.625" to 2.88" diameter Conductor/Bus Bar
- Bronze Eye Screw – 3/4-6 ACME
- Tested per ASTM F855-17 to Grade 5H (47kA; 127kA 1st cycle peak; X/R=30)
- Available with factory-assembled sets (recommended) or as an individual component

CATALOG NO.	DESCRIPTION	Weight
PSC6003700	5H 2.5" Grounding C-Clamp	3.1 lbs. (1.4 kg)

Contact your local HPS representative for custom length grounding sets



hubbelpowersystems.com



**For product inquiries, please contact
your local sales representative or customer service representative.**

©2019 Hubbell Incorporated.
Because Hubbell has a policy of continuous product improvement,
we reserve the right to change design and specifications without notice.
Printed in the U.S.A. | SF_09_195E